


FLEX COB - PLUS 1400-2700

Led Strip



Alimentazione / Operating Voltage	24 V
Potenza / Power	14 W/mt
Larghezza Pcb / Width Pcb	8 mm
Altezza / Height Stripe	2 mm
Lunghezza / Length Stripe	5000 mm
Taglio segmento/ Length per Cut	45,5 mm
N° LED	COB
IP	20
Temperatura esercizio Storage Temperature	- 30° C - + 70°C
Lifetime	L70B20 50000H

	Flusso Luminoso Luminous Flux	Efficienza Efficiency	Colore Luce Led Color
DA-COB-1400-2700	1464 lm/mt	104 lm/mt	2700 K

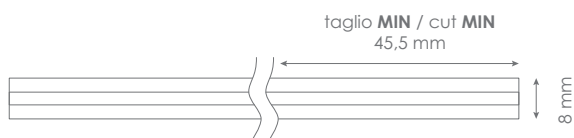

Via Cadorna, 40/42
20032 Cormano (MI)
Tel. +39 02 84269630
Fax +39 02 84269631
info@dadalighting.com
www.dadalighting.com



RoHS
Compliant

CRI>92

FLEX COB - PLUS 1400-2700

Led Strip

Light efficiency:

105 Lumen/Watt

Light quality:

CRI: 92,3

Color temperature:


2753 K

Output: 1464 lm

Peak: 301 cd

Power: 14,0 W

24,0V @ 0,583A

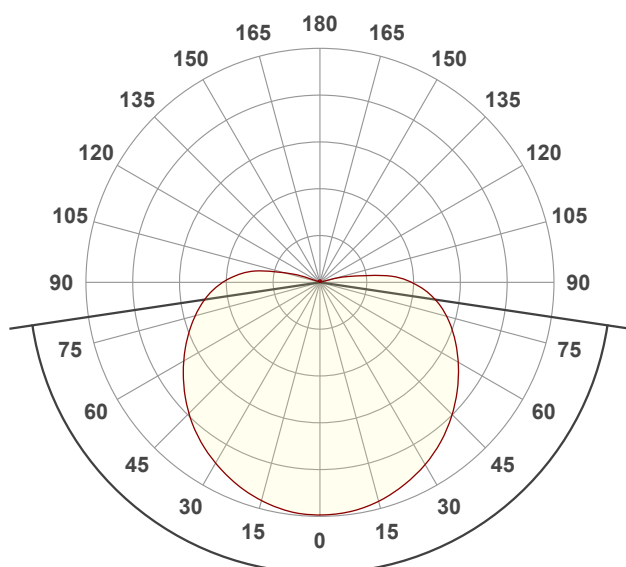

Beam angle


163°

Color



CIE1931
x: 0,464
y: 0,424




Spectra

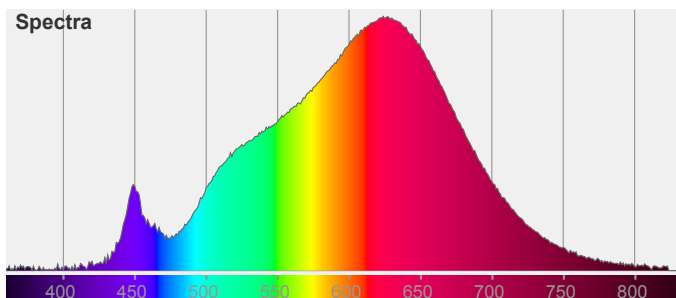

Light measurement was created using the Viso Systems - Light Inspector. www.visosystems.com

FLEX COB - PLUS 1400-2700

Led Strip

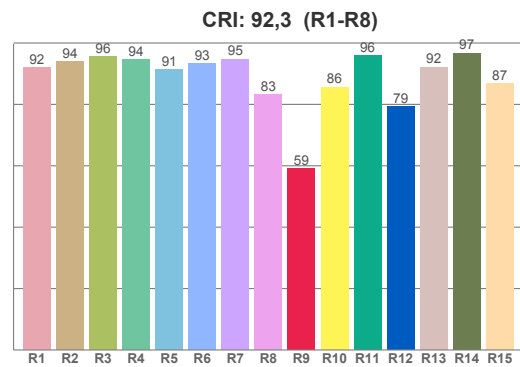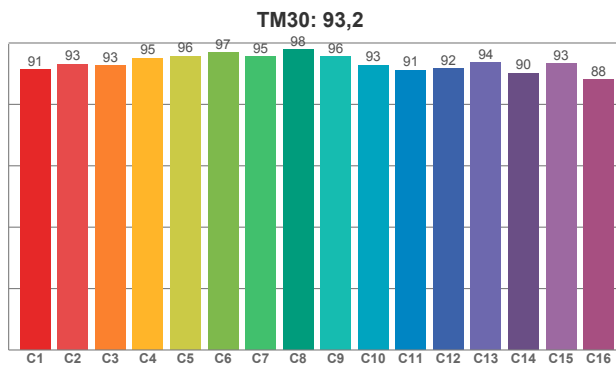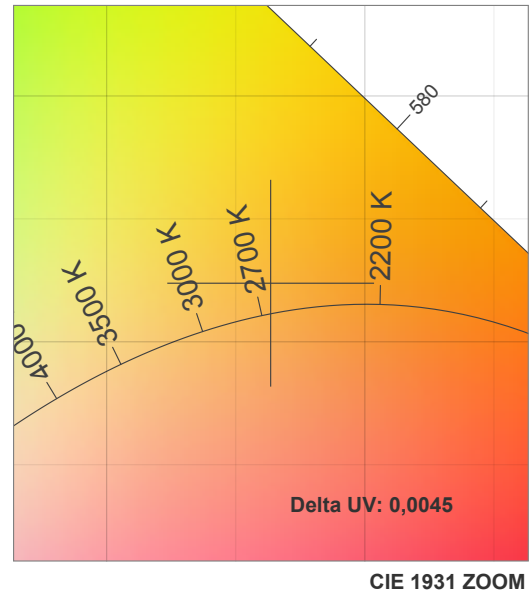

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
91,96	93,86	95,60	94,50	91,28	93,34	94,76	83,15	59,08	85,64	95,94	79,32	92,13	96,74	86,79

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,28	93,13	92,54	95,06	95,70	96,91	95,48	97,79	95,54	92,83	91,15	91,66	93,67	90,20	93,17	87,97

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,50	95,47	91,70	91,81	92,08	92,03	93,75	94,56	91,61	87,07	86,90	89,32	91,34	85,31	87,17

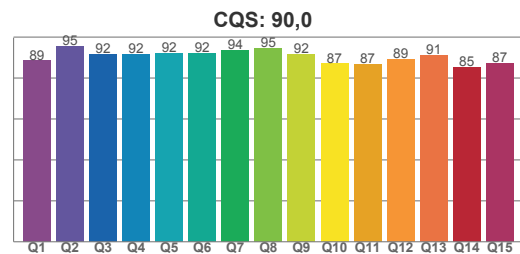


Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
2753 K	92,3	59,1	93,2	97,5	90,0	0,5	0,4	0,3	0,4	0,0045

FLEX COB - PLUS 1400-2700

Led Strip

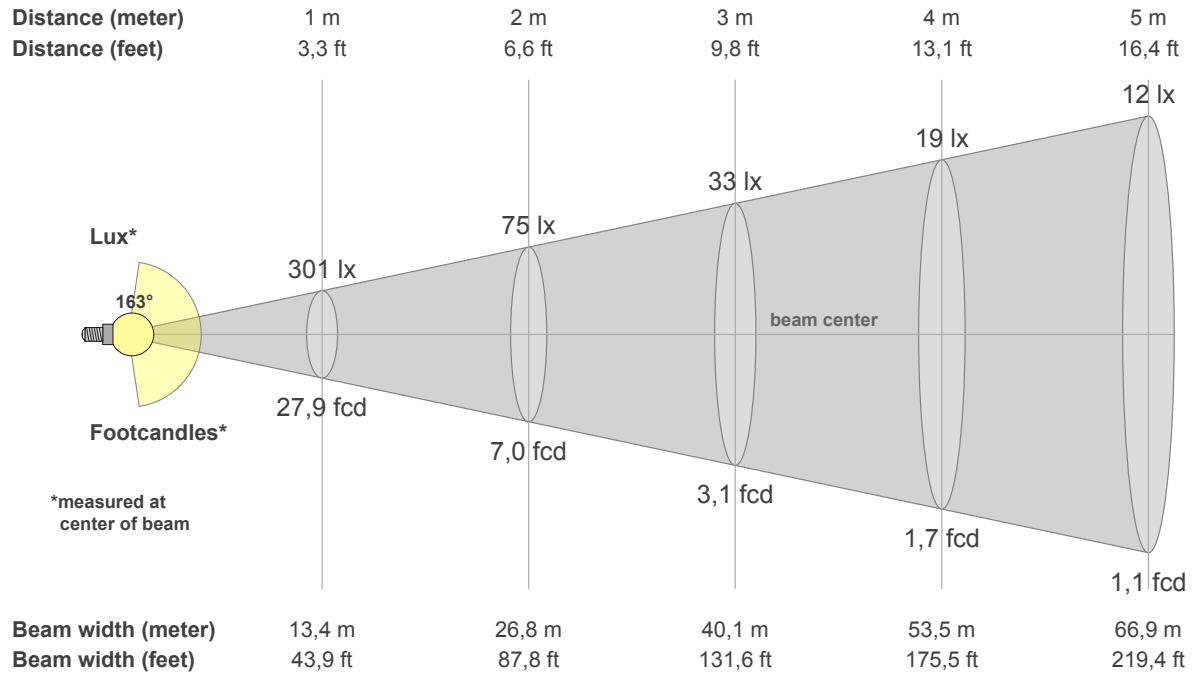

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
301	298	289	277	261	242	221	199	177	152	117	60	8	2	2	3	3	3	3	3
100%	99%	96%	92%	87%	80%	73%	66%	59%	51%	39%	20%	3%	1%	1%	1%	1%	1%	1%	1%

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
301	298	289	277	261	242	221	199	177	152	117	60	8	2	2	3	3	3	3	3
100%	99%	96%	92%	87%	80%	73%	66%	59%	51%	39%	20%	3%	1%	1%	1%	1%	1%	1%	1%

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
301	297	288	275	259	239	218	196	174	152	125	89	32	3	3	3	3	3	3	3
100%	99%	96%	91%	86%	80%	73%	65%	58%	50%	42%	30%	11%	1%	1%	1%	1%	1%	1%	1%

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
301	297	288	275	259	239	218	196	174	152	125	89	32	3	3	3	3	3	3	3
100%	99%	96%	91%	86%	80%	73%	65%	58%	50%	42%	30%	11%	1%	1%	1%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
163,0°	211,7°	221,5°	53,6%	33,8%