

FLEX RESINA 15-3000

Led Strip



Alimentazione / Operating Voltage	24 V
Potenza / Power	15 W/mt
Larghezza Pcb / Width Pcb	10 mm
Altezza / Height Stripe	2 mm
Lunghezza / Length Stripe	5000 mm
Taglio segmento/ Length per Cut	35 mm
N° LED	180 / mt
IP	20
Temperatura esercizio Storage Temperature	- 30° C - + 70°C
Lifetime	L70B20 50000H

	Flusso Luminoso Luminous Flux	Efficienza Efficiency	Colore Luce Led Color
DA-RESINA15-3000	1066 lm/mt	71 lm/mt	3000 K



Via Cadorna, 40/42
20032 Cormano (MI)
Tel. +39 02 84269630
Fax +39 02 84269631
info@dadalighting.com
www.dadalighting.com

FLEX RESINA 15-3000

Led Strip

Light efficiency:

71 Lumen/Watt

Light quality:

CRI: 92,5

Color temperature:


3081 K

Output: 1066 lm

Peak: 344 cd

Power: 15,0 W

24,0V @ 0,625A

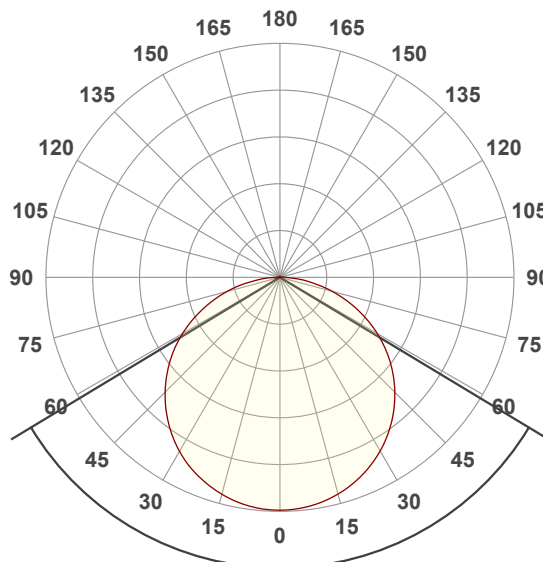

Beam angle


117,8°

Color







CIE1931
x: 0,428
y: 0,394

Spectra

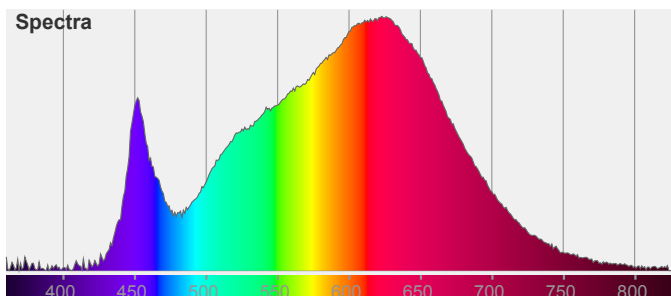

FLEX RESINA 15-3000

Led Strip

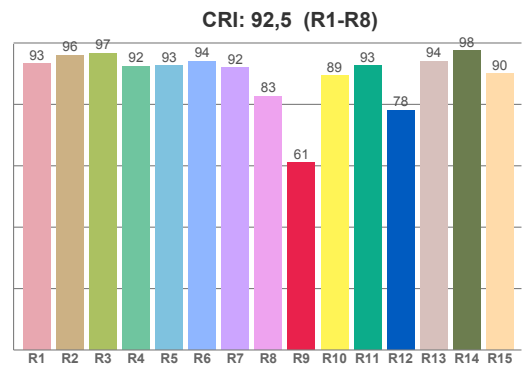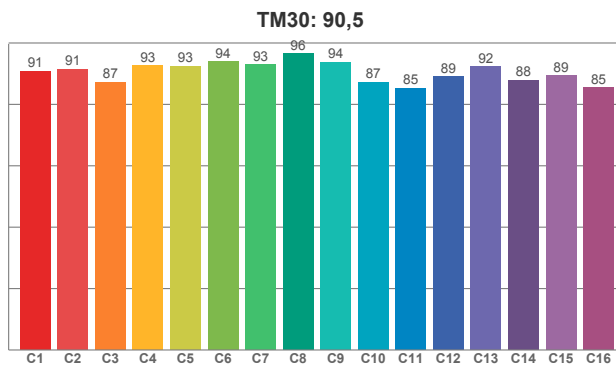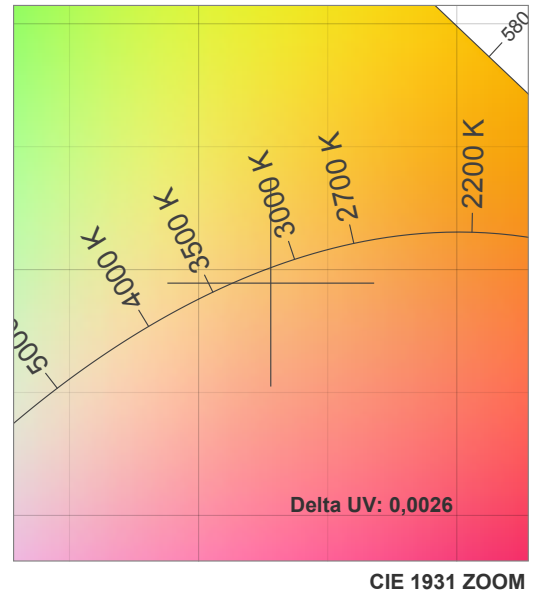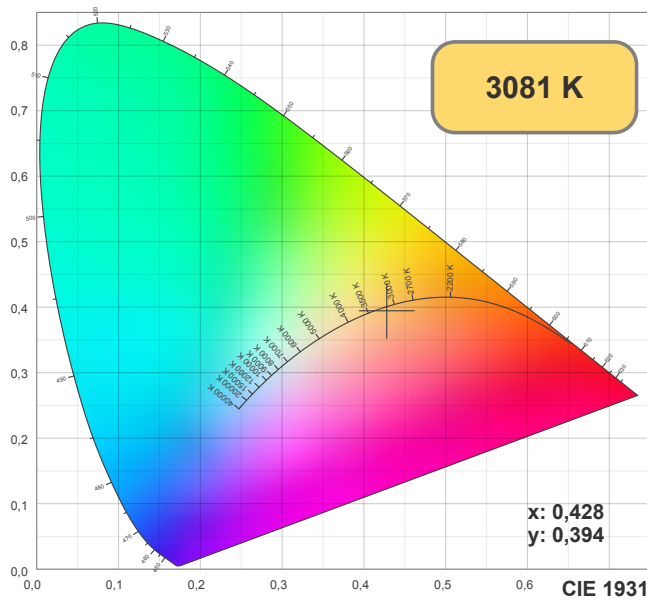

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93,17	96,07	96,69	92,40	92,54	94,11	91,89	82,74	60,97	89,38	92,60	78,13	94,10	97,57	89,97

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90,86	91,42	87,29	92,64	92,50	93,92	92,92	96,49	93,74	87,17	85,22	89,10	92,37	87,82	89,34	85,47

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89,26	97,06	84,82	84,98	89,77	90,68	88,37	90,75	97,33	91,73	90,56	90,19	90,87	87,18	87,65

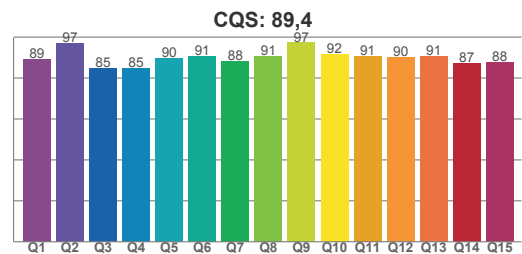


Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
3081 K	92,5	61,0	90,5	100,7	89,4	0,4	0,4	0,2	0,3	-0,0026

FLEX RESINA 15-3000

Led Strip

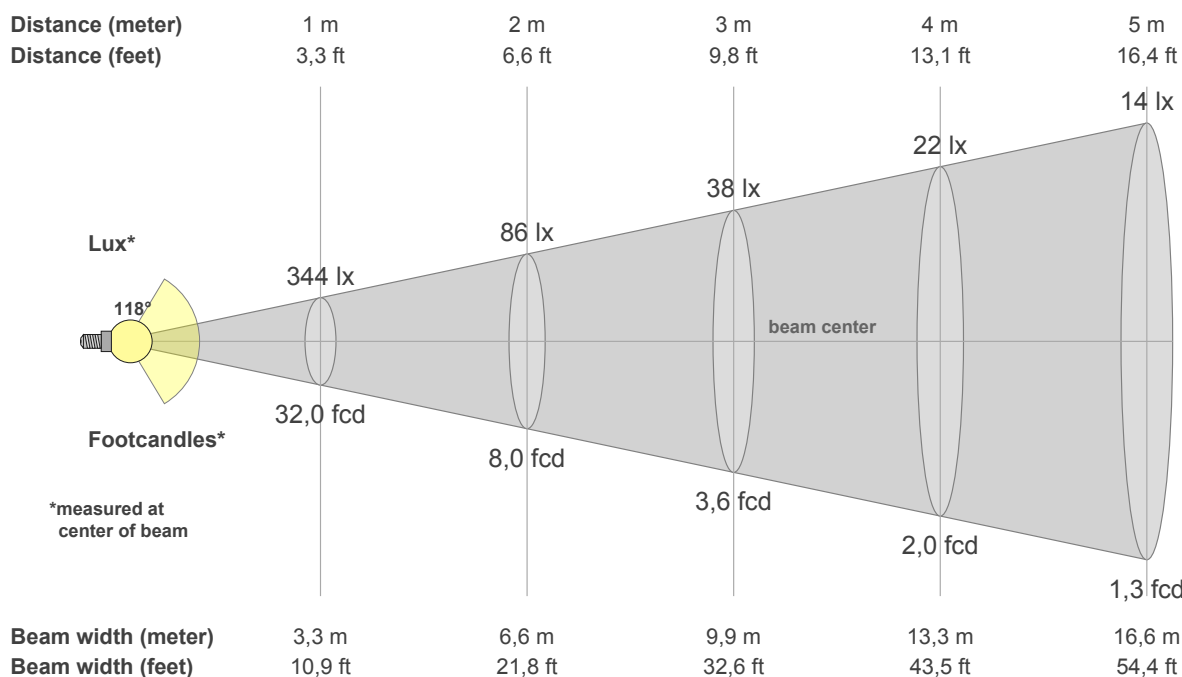

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
344	343	339	332	322	311	296	280	261	240	217	193	166	138	109	80	53	29	9	3
100%	100%	99%	96%	94%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	23%	15%	8%	3%	1%

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
344	343	339	332	322	311	296	280	261	240	217	193	166	138	109	80	53	29	9	3
100%	100%	99%	96%	94%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	23%	15%	8%	3%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
344	344	339	332	323	311	297	280	261	240	217	193	166	139	110	82	54	27	10	2
100%	100%	98%	96%	94%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	24%	16%	8%	3%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
344	344	339	332	323	311	297	280	261	240	217	193	166	139	110	82	54	27	10	2
100%	100%	98%	96%	94%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	24%	16%	8%	3%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
117,8°	167,1°	180,8°	75,3%	50,5%