

FLEX RESINA 20-3000

Led Strip



Alimentazione / Operating Voltage	24 V
Potenza / Power	20 W/mt
Larghezza Pcb / Width Pcb	10 mm
Altezza / Height Stripe	2 mm
Lunghezza / Length Stripe	5000 mm
Taglio segmento/ Length per Cut	50 mm
N° LED	120 / mt
IP	20
Temperatura esercizio Storage Temperature	- 30° C - + 70°C
Lifetime	L70B20 50000H

	Flusso Luminoso Luminous Flux	Efficienza Efficiency	Colore Luce Led Color
DA-RESINA20-3000	1627 lm/mt	81 lm/mt	3000 K



Via Cadorna, 40/42
20032 Cormano (MI)
Tel. +39 02 84269630
Fax +39 02 84269631
info@dadalighting.com
www.dadalighting.com



FLEX RESINA 20-3000

Led Strip

Light efficiency:

81 Lumen/Watt

Light quality:

CRI: 92,6

Color temperature:


3033 K

Output: 1627 lm

Peak: 510 cd

Power: 20,0 W

24,0V @ 0,833A

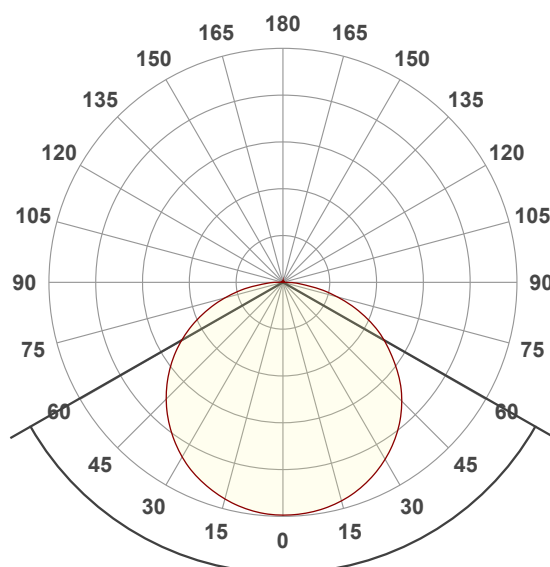

Beam angle


120,5°

Color







CIE1931
x: 0,430
y: 0,393

Spectra

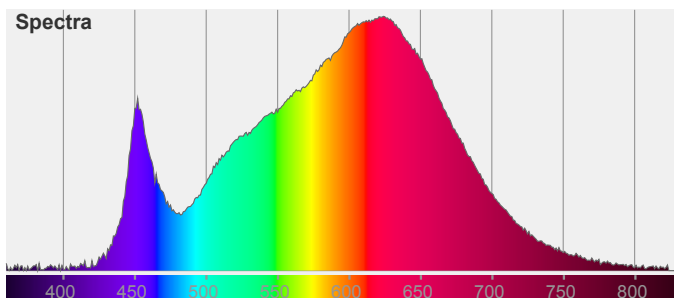

FLEX RESINA 20-3000

Led Strip

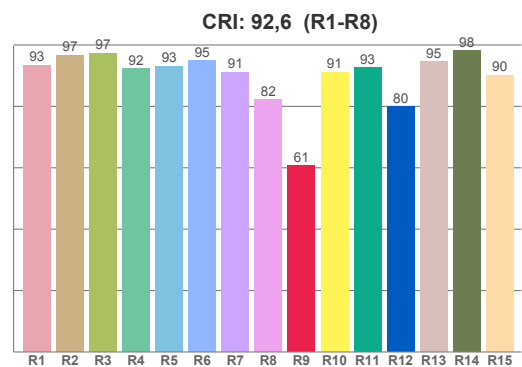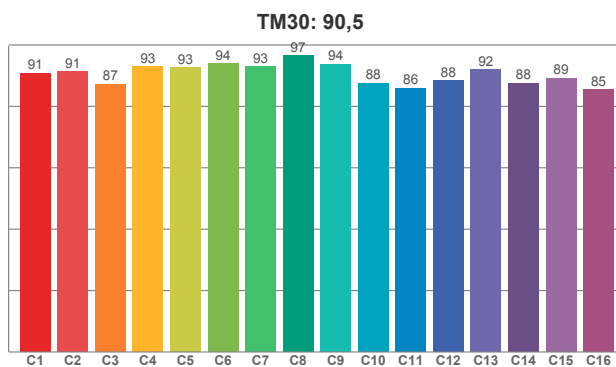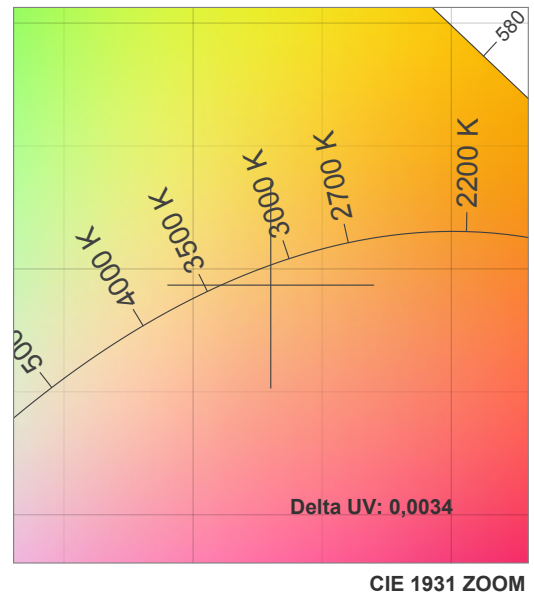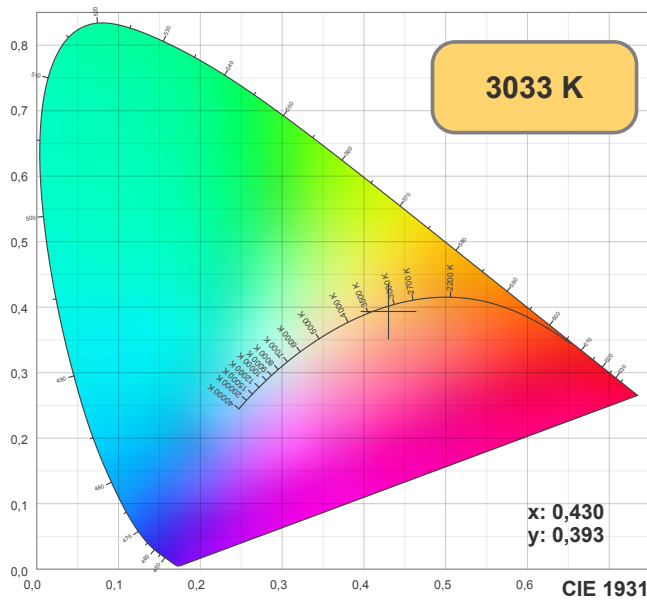

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93,47	96,74	97,38	92,33	93,04	94,84	91,18	82,12	60,67	91,08	92,70	79,91	94,59	98,16	90,21

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90,75	91,24	87,24	92,84	92,62	93,91	92,86	96,51	93,77	87,51	85,97	88,30	92,03	87,59	89,18	85,49

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,97	96,80	85,20	85,15	89,94	91,01	88,25	90,28	97,52	91,85	90,38	89,66	90,27	87,04	87,43

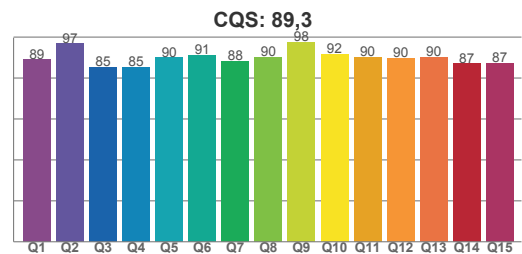


Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
3033 K	92,6	60,7	90,5	100,6	89,3	0,4	0,4	0,3	0,3	-0,0034

FLEX RESINA 20-3000

Led Strip

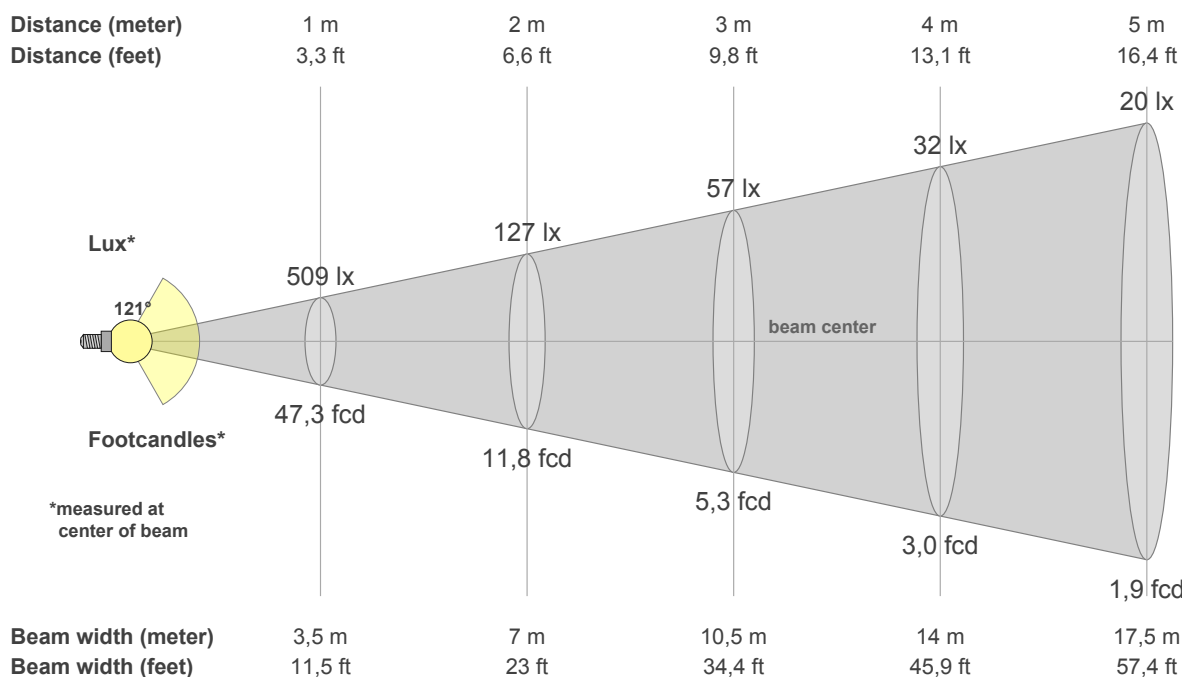

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
509	508	504	495	482	467	447	424	398	367	333	295	257	216	171	124	80	38	15	3
100%	100%	99%	97%	95%	92%	88%	83%	78%	72%	65%	58%	50%	42%	34%	24%	16%	8%	3%	1%

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
509	508	504	495	482	467	447	424	398	367	333	295	257	216	171	124	80	38	15	3
100%	100%	99%	97%	95%	92%	88%	83%	78%	72%	65%	58%	50%	42%	34%	24%	16%	8%	3%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
509	508	501	490	478	461	441	418	390	361	329	294	257	217	175	132	89	49	21	3
100%	100%	98%	96%	94%	91%	87%	82%	77%	71%	65%	58%	50%	43%	34%	26%	18%	10%	4%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
509	508	501	490	478	461	441	418	390	361	329	294	257	217	175	132	89	49	21	3
100%	100%	98%	96%	94%	91%	87%	82%	77%	71%	65%	58%	50%	43%	34%	26%	18%	10%	4%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
120,5°	168,3°	182,6°	74,4%	49,6%